

# 4284 and 4284X

## 4000 SERIES SPEAKER UNIT WITH INTEGRATED CAMERA FOR VX2200 DIGITAL SYSTEM



Art. 4284X-1

Art. 4284X-1/A

Art. 4284X-1/M

4000  
SERIES

Digital to functional  
interface with built-in  
speaker unit & camera  
specific for VX2200 digital  
system



As the previous version Art. 4283, this new model also allows the user to set the video mode (balanced signal on 2 wires or composite video signal on coax cable)

Two operation modes for the open-door relay (dry contact and capacitive discharge) and to set the "lock time" and the conversation time.

For 4284X versions are also available:

- An embeded proximity reader up to 60 keys;
- Wiegand interface to be used combined with other access controls;
- RS485 interface to program the module via software.



Art. 4284-0



Art. 4284-1



Art. 4284-2



Wide camera  
optional



IDC  
connector



Art. 4284x-0



Art. 4284x-1



Art. 4284x-2



Wide camera  
optional




Proximity  
reader



IDC  
connector

**VIDEX®**

[www.videx.it](http://www.videx.it)

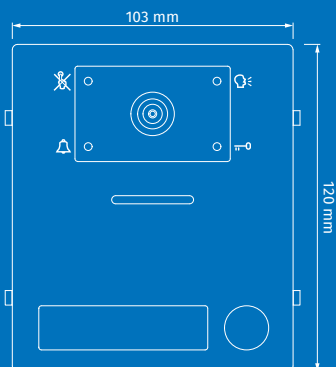

## Key features include:

- Easily connects to button expansion modules 4042,4043,4044 and 4045 through flat cables
- Proximity reader up to 60 keys<sup>1</sup>
- Wiegand interface to be used combined with other access controls<sup>1</sup>
- RS485 interface to program the module via software<sup>1</sup>

<sup>1</sup>4284X only.

Art.		4284-0	4284-1	4284-2	4284X-0	4284X-1	4284X-2
Buttons	Built-in	0	1	2	0	1	2
	Max	40			42		
Audio/Video		Audio/Video					
Camera sensor/LED Type/Tiltening		CMOS/White light Colour/10°					
Video signal mode		Balanced/Coax					
Plate STD/VR		Standard					
Plate finishes		Stainless steel (Standard), /A Anodized aluminium, /M Matte					
Wide Camera opt		Available (/WD)					
Name plate Back light		No	Yes/Blue				
Visual signalling LED		Busy, Ring, Speak, Door Open					
Built-in proximity key reader		---			Yes 125Khz H4102 60 keys (1000 using PC programming)		
Programmings		Conv. time, Door time, Device No			Conv. time, Door time, Device No, Tags		
Programming mode		By dip-switch			By dip-switch or by PC		
Interfaces		---			RS-485/WIEGAND		
Size		1 module					
Adjustment potentiometers		Microphone, Loudspeaker, Balance					
Relay		1					
Relay contacts		Dry contacts Capacitor discharge (12Vac/dc 1A max)					
Relay voltages		Max 24Vac/dc 2A					
IDC connector		Yes					
PTE input		Yes					
External camera input		Yes					
Working voltage		12 Vdc					
Working temperature		-10 +50°C					

DS-4284-4284X-EN - V1.0 - 31/05/19