

4204X

4000 SERIES SPEAKER UNTIS FOR VX2200 DIGITAL SYSTEM



Art. 4204X-1/M

**4000
SERIES**

Digital to functional
interface with built-in
proximity reader specific
for VX2200 digital system

Two operation modes for the open-door relay (dry contact and capacitive discharge) and to set the "lock time" and the conversation time.

Other features:

- An embeded proximity reader up to 60 keys;
- Wiegand interface to be used combined with other access controls;
- RS485 interface to program the module via software.



Art. 4204x-0/M



Art. 4204x-1/M



Art. 4204x-2/M



Proximity
reader




IDC
connector

 **VX2200**

 **VIDEX®**

www.videx.it

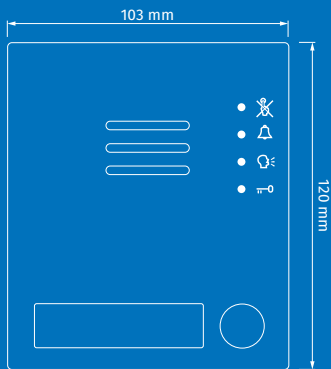

Key features include:

- Easily connects to button expansion modules 4042,4043,4044 and 4045 through flat cables
- Proximity reader up to 60 keys
- Wiegand interface to be used combined with other access controls
- RS485 interface to program the module via software

Art.		4204X-0	4204X-1	4204X-2
Buttons	Built-in	0	1	2
	Max		42	
Audio/Video		Audio		
Plate STD/VR		Standard		
Plate finishes		/M Matte, /A Anodized aluminium		
Name plate Back light		Yes/Blue		
Visual signalling LED		Busy, Ring, Speak, Door Open		
Built-in proximity key reader		Yes 125Khz H4102 60 keys (1000 using PC programming)		
Programmings		Conv. time, Door time, Device No, Tags		
Programming mode		By dip-switch or by PC		
Interfaces		RS-485/WIEGAND		
Size		1 module		
Adjustment potentiometers		Microphone, Loudspeaker, Balance		
Relay		1		
Relay contacts		Dry contacts Capacitor discharge (12Vac/dc 1A max)		
Relay voltages		Max 24Vac/dc 2A		
IDC connector		Yes		
PTE input		Yes		
Working voltage		12 Vdc		
Working temperature		-20 +60°C		