4000 SERIES

4903

Centralised/stand-alone access control module with numeric keypad

IPURE®

GSM

4903/M with 1-module wall installation kit 4881

---

2 dry contacts relays

2 PTE inputs

2 codes (stand-alone)
10000 permantent codes (IPure)
400 permanent codes (GSM)
32 temporary codes (GSM)

RS-485

Programmable blue backlight codelock

Programming by keypad, PC or SMS

Available finishes

Anodized aluminium	Matte finished stainless steel
4903/A	4903/M

35 YEARS 1986 2021

VIDEX®

Centralised/stand-alone access control module with numeric keypad

Centralised/stand-alone access control module for GSM system. 2 access codes for stand-alone operation.
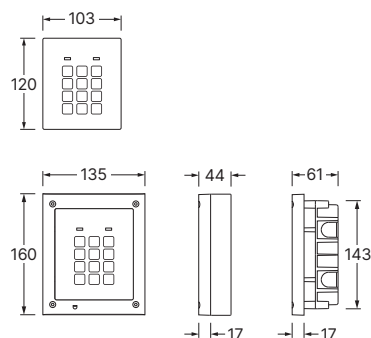10000 access codes through centralisation with IPure system.
400 access codes and 32 temporary access codes through centralisation with GSM system. Configuration through Apps, SMS, cloud and PC software. Backlighting of the 12 buttons with blue LEDs, 2 LEDs for status/operation alerts. 2 relays with contacts C, NC, NO (24V AC/DC - 2A) programmable for temporary activation (01 ... 255 seconds) or for switching operation. 2 PTE inputs (active/low) to directly control relays 1 and 2. Acoustic and visual alerts during operation. Two operating modes: stand-alone mode or centralised mode through RS-485. Vandal resistant plate with IK07 and IP65 protection rating (only for 4903/M). Operating temperature -20°/+60°C. Power supply 12/24V AC/DC - 2A. Dimensions: 103×120×43mm. 1 module.

Technical characteristics

Relay number, contacts and voltages	2, dry contacts, max 24Vac/dc 2A
PTE input	2, active/low
Operation	Centralised/stand-alone
Programming	Keypad/PC/SMS
Number of codes	2 codes (standalone) 10000 permanent codes (IPure) 400 permanent codes (GSM) 32 temporary codes (GSM)
Interfaces	RS-485
Keypad backlight	Blue. Programmable
Finishes	Matte stainless steel (4903/M) Anodized aluminium (4903/A)
Mounting	Modular 4000 series 1 module
Power supply	12/24 Vac/dc
Working temperature	-20 +60°C

103
120

135
160
44
61
143
17
17

Measurements in mm

Accessories

	4851 **1-module flush installation kit**
	4881 **1-module wall installation kit**
	4871 **1-module rain shield with frame for flush installation kit**
	4891 **1-module rain shield with frame wall installation kit**

ISO 9001
SGS
Cert. N. IT05/1217