

521B

POWER SUPPLY UNIT

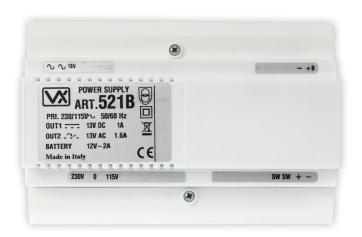

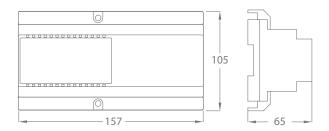

230V input, 13.5Vac 1.6A Max (pulsed) or 13.5Vdc 0.8A continuous (1A pulsed) outputs power supply unit. The power transformer is built in a 9 modules A type DIN box (157 mm) and can be installed on a DIN bar or fixed directly to the wall.

| Device Type | Power supply unit |
|--------------------|--|
| Input voltage | 230V |
| Frequency | 50Hz |
| Output voltage | 13.5Vac 1.6A Max (pulsed) 13.5Vdc 0.8A continuous (1A pulsed) |
| Housing | 9 modules A Type DIN box |
| Mounting | DIN bar or surface |
| Dimensions (mm) | 157x105x65 |
| Function | Used normally for the audio section of a VX2200 Digital System. It allows the connection of a backup battery that allows the system to operate in case of mains failure (electric lock connected to DC output). The terminals SW SW are to connect a switch to switch the PSU on/off. |



VIDEX ELECTRONICS S.P.A

Via del Lavoro, 1 - 63846 Monte Giberto (FM) - ITALY Tel: (+39) 0734 631669 - Fax: (+39) 0734 632475







www.videx.it - info@videx.it - facebook.com/videx.electronics